

# K55 SERIES COMPOSITE ISOLATED BONNET VALVE PART NUMBER MATRIX

0.5 inch to 1.5 inch Basic Valves Without Adapters <sup>[1]</sup>

FILL IN PROPER DESIGNATIONS TO DETERMINE PRODUCT NUMBER:

  K     5     5   -   X     2   -   4     0     0     0  

BODY SIZE (MODEL)

0 = 0.5 inch (550)  
 1 = 1 inch (551)  
 4 = 1.5 inch (554)


VALVE & SPRING OPTIONS

00 = Normally Open  
 03 = Fail Safe Spring Closed 30 psi (2 bar)  
 04 = Fail Safe Spring Closed 60 psi (4 bar)  
 05 = Fail Safe Spring Closed 100 psi (7 bar)  
 10 = NO Limit Stop  
 14 = Fail Safe Spring Closed 60 psi (4 bar), Limit Stop  
 15 = Fail Safe Spring Closed 100 psi (7 bar), Limit Stop

SEALS / DIAPHRAGM / DISK

1 = EP / Buna / EP  
 5 = FKM / Buna / FKM  
 6 = Butyl / Buna / Butyl

Note: EP = Ethylene Propylene; FKM = Fluorocarbon

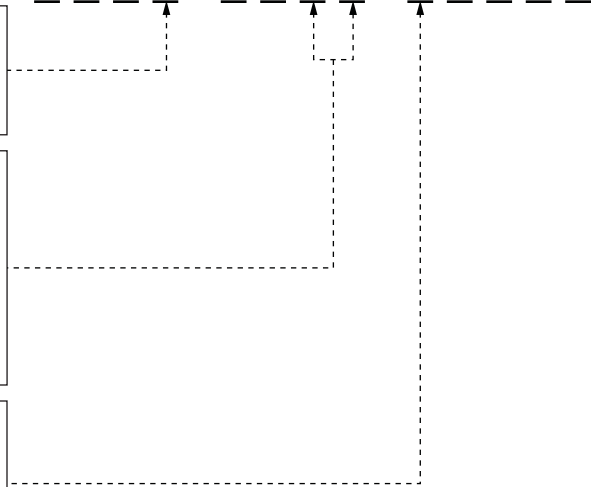

[1] NOTES:

- 0.5 through 1.5 inch union ends with female socket connectors available – sold separately.
- 0.5 through 1.5 inch grooved adapters and retaining ring hardware available – sold separately.
- 2 through 3 inch threaded adapters with flanged or socket ends available – sold separately.

Buna-N / EPDM valves typical for water applications.  
 FKM / FKM valves typical for acid applications.  
 Buna-N / Butyl valves typical for caustic applications.