

PRESSURE VESSEL FITTINGS



FLEX CONNECTORS, VACUUM BREAKERS,
WRENCHES, AND SIDE ADAPTERS

Flex Connector Assembly (NPT x NPT)



Part Number	Description	Max. Temperature	Max. Pressure
NI-5285	2" MNPT x 2" MNPT, 14" Overall Length	180°F	150 PSI
NI-5286	3" MNPT x 3" MNPT, 14" Overall Length	180°F	150 PSI
TS-5285	2" MNPT x 2" MNPT, 12" Overall Length	180°F	150 PSI
TS-5286	3" MNPT x 3" MNPT, 13" Overall Length	180°F	150 PSI

Straight Connector




Part No.	Description
TS-5045	3" NPSM x 3" NPT (CPVC) 150 PSI / 150°F

Elbow Connector



Part No.	Description
TS-5201	2" NPSM to 2" Slip (CPVC) 150 PSI / 150°F


Vacuum Breakers



Part Number	Description	Max. Temperature	Max. Pressure
SM-VB-34SP-CPVC	3/4" Spigot, machined CPVC body	160°F	150 PSI
TS-10725	1" FNPT, molded glass-filled PP body	180°F	100 PSI
TS-10724	1-1/2" MNPT, machined PVC body	120°F	125 PSI
SM-VB4P	1-1/2" MNPT, machined PVC body	140°F	125 PSI
SM-VB4P-SPIG	1-1/2" Spigot, machined PVC body	140°F	125 PSI
SM-VB4P-CPVC	1-1/2" MNPT, machined CPVC body	160°F	150 PSI
SM-VB4P-CPVC-SPIG	1-1/2" Spigot, machined CPVC body	160°F	150 PSI

Wrenches

Part No.	Description
TS-6568-2	4" Closure (4825-1)
TS-7729	6" Closure (2695-1)

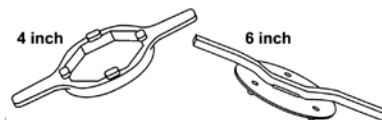

Brass Side Adapter



Part Number	Description	Max. Temperature	Max. Pressure
TS-1661	0.75" NPT to 0.75" FNPT	150°F	150 PSI