

POU COMPONENTS



PREMIUM FAUCETS



SWT's **Premium Faucets** for point-of-use (POU) water treatment systems combine an attractive, contemporary appearance with materials that ensure durability, reliability, safety, and purity.

FEATURES

- Ceramic valve design provides smooth operation.
- Solid metal body construction provides superior durability.
- Lead-free brass assures regulatory compliance to ANSI/NSF standards and California Prop. 65.
- Long reach spout rotates 360 degrees.
- Air gap option available to provide protection from back-siphonage for RO system uses.
- Open relief option available to provide dependable protection for undercounter filters at a reasonable cost. Water pressure reaches the filter only when the faucet lever is activated. This limits stress and potential failure of the filter housing.

LONG REACH FAUCETS

| Part Number | Description |
|-------------|--------------------------|
| YH10041 | Polished Chrome Finish |
| YH10042 | Brushed Nickle Finish |
| YH10043 | Oil Rubbed Bronze Finish |
| YH10044 | Polished Brass Finish |
| YH10045 | White Gloss Finish |
| YH10046 | Almond Gloss Finish |
| YH10047 | Black Gloss Finish |
| YH10048 | Oil Rubbed Copper Finish |

LONG REACH AIR GAP FAUCETS


| Part Number | Description |
|-------------|--------------------------|
| YH10051 | Polished Chrome Finish |
| YH10052 | Brushed Nickle Finish |
| YH10053 | Oil Rubbed Bronze Finish |

FAUCET CONNECTORS

| Part Number | Description |
|--------------|--|
| GJ-C13208U7S | Quick Connect 7/16 inch faucet x 1/4 inch tube adapter |
| GJ-C13212U7S | Quick Connect 7/16 inch faucet x 3/8 inch tube adapter |

ANGLE STOP ADAPTER VALVES

| Part Number | Description |
|----------------|--|
| Gj-PPASV121208 | 3/8 inch male thread to 3/8 inch female compression x 1/4 inch tube O.D. |
| Gj-PPASV121212 | 3/8 inch male thread to 3/8 inch female compression x 3/8 inch tube O.D. |

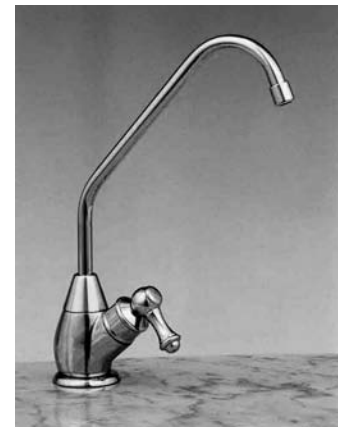

SPECIFICATIONS

Dimensions:

9-1/2 inch Height x 5-1/2 inch Reach

Faucet Base:

1-3/4 inch Diameter

Hole Size Requirements:

1/2 inch Diameter

Operating Pressure:

125 psi (8.3 bar) maximum

Temperature Range:

40 to 100°F

Connection Size:

1/4 inch Compression Fitting Standard

NOTE: A Faucet Connector is required to connect the faucet to its water source.