


RETENTION TANKS



FIBERGLASS WRAPPED & PE LINER

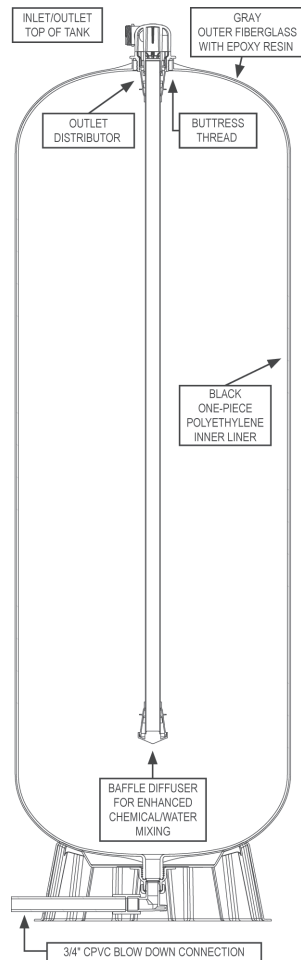

Features

- Convenient inlet/outlet piping connection at the top of the tank
- Inlet/outlet adapter easily accommodates the use of a vacuum breaker
- Inlet/outlet buttress thread for strength
- Full 3/4" (1.050" O.D.) pipe quick connect blowdown drain at lowest point of tank
- 360 degree drain orientation
- Black one piece polyethylene liner for impact and corrosion resistance
- Includes 1-1/4" socket and 1-1/2" spigot PVC straight solvent fitting kit (P/N LC-V3007-07) and 1-1/4" plastic straight male NPT fittings (P/N LC-V3317)
- Bypass valve option available (P/N LC-V3006)
- 5 year limited warranty
- Tested and Certified by NSF International against NSF/ANSI/CAN Standard 61 for material requirements and NSF/ANSI/CAN 372
- Made in USA

Specifications

- 75 psi (517 kPa) maximum operating pressure
- 120°F (49°C) maximum operating temperature
- 0 maximum allowable operating vacuum
- A vacuum/pressure relief valve of adequate size must be incorporated in the plumbing

Part Number	Tank Assembly Diameter		Tank Assembly Height		Capacity		Shipping Weight		Carton Qty.
	inch	mm	inch	mm	gallon	liter	lb	kg	
LC-RT40	21	533	40.5	1,029	40	151	37	17	1
LC-RT80	21	533	67.5	1,715	80	303	66	30	1
LC-RT120	24	607	78.5	1,994	120	454	80	36	1