

# FITTINGS



## INLINE BYPASS VALVE ASSEMBLY



SWT's *In-Line Bypass Valve Assembly* is designed to be used as a stand-alone inline bypass on any cold water supply. It is compatible with any brand of water softener, filter, portable exchange tank, in/out filter, and even cartridge filter system.

Injection molded from non-corrosive engineering plastic, the In-Line Bypass Valve Assembly is more versatile than other bypass valves available today. It offers a wide variety of connection fittings options (see below Part Number Matrix for the complete list). This product is NSF/ANSI 61 and 44 certified.

### SPECIFICATIONS:

Operating Pressure: ..... 20 to 125 psi  
 138 to 862 kPa  
 Temperature: ..... 40 to 110°F  
 4 to 43°C


**Note:** Install only on cold water supplies.

### INCLUDED:

- (1) Bypass Valve
- (1) pair of In-Line Adapter Fittings
- (2) Fittings Kits of choice—  
 each fitting kit includes  
 (1) pair of fittings and hardware

### OPTIONAL:

Wrench (P/N BP-Wrench)

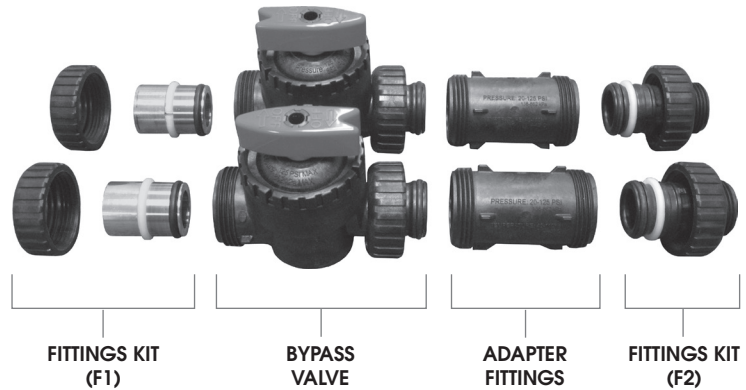

### PART NUMBER MATRIX:

#### BP-(F1)-(F2)

##### (F1)(F2) FITTINGS KITS

00	1" PVC male NPT elbow	07	1.25" & 1.5" PVC solvent
01	3/4" x 1" PVC solvent elbow	08	1.25" plastic male BSPT
02LF	1" lead free brass sweat	09LF	1.25" & 1.5" lead free brass sweat
03LF	3/4" lead free brass sweat	12LF	3/4" lead free brass SharkBite®
04	1" plastic male NPT	13LF	1" lead free brass SharkBite®
05	1.25" plastic male NPT	14	3/4" plastic male BSPT
06	1" plastic male BSPT	15	3/4" John Guest® QC elbow

**Example:** BP-02LF-04 is an In-Line Bypass Valve Assembly with 1" lead free brass sweat fittings and 1" plastic male NPT fittings. (See photos above.)